higher education & training

Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA

MARKING GUIDELINE

NATIONAL CERTIFICATE

QUANTITY SURVEYING N4

2 December 2019

This marking guideline consists of 9 pages.

Copyright reserved

SECTION A

QUESTION 1

			1.1.1 2/15,000 = 30,000 2/ 5,000 = 10,000 40,000 ✓ - 4/0,220 0,880 39,120 m ✓				1.2.3 C.m. bagging to vert. int. bk. wls.✓
			1.1.2 ✓ 220 mm Thk. pls. bk. wl.		38,24 2,70		
	39,12 2,70				40,00 2,70		1.3.1 2 Cts. p.v.a. undercoat pt. on vert. ext. bk. wls.✓
			1.2.1 Ext. per. 2/15,000 = 30,000 2/ 5,000 = 10,000 40,000 m✓		38,24 2,70		1.3.2 2 Cts. p.v.a. undercoat pt. on vert. int. bk. wls. ✓
			Int. per. 40,000 ✓ - 8/0,222 1,760 ✓ 38,240 m ✓				1.4.1 Ddt. ✓ 220 mm Thk. bk. wl. ✓ 2,100 + 0,075 =2,175 m ✓
			1.2.2		1,50 2,18		1.4.2 and 1.4.3
	40,00 2,70		C.m. bagging to vert. ext. bk. wls. ✓				Ddt. Ext. c.m. bagging a.b ✓ &
					1,50 2,18	✓	Ddt. Int. c.m. bagging a.b. ✓
			(1)				(2)

			1.5.1 Add. ✓ C.m. bagging n.w. n.e. 300 mm wide. ✓	2			
✓ 2	0,22 2,10						
✓ 2	2,10		1.5.2 2Cts. p.v.a. pt. in n.w. n.e. ✓ 30 mm wide. ✓		1,50		
2	1,70		1.6.1 75x114 mm P.c.conc lintel n.e.3m long. ✓ 1,500 2/ 100 0,200 1,700 m ✓				
			1.6.2 2 Cts. p.v.a. undercoat pt. to hor. soffits in n.w n.e. 300 mm wide. ✓				

[30]

QUESTION 2

2.1

			1.1.1 2/15,000 = 30,000 ✓ 2/ 5,000 = 10,000 ✓ 40,000 ✓ - 4/0,220 0,880 ✓ 39,120 m ✓				1.2.2 C.m. bagging to vert. int. bk. wls.
			1.1.2 220 mm Thk. pls. bk. wl.				1.3.1 2 Cts. p.v.a. undercoat pt. on vert. ext. bk. wls.
			1.2.1 Ext. per. 2/15,000 = 30,000 2/ 5,000 = 10,000 40,000 m				1.3.2 2 Cts. p.v.a. undercoat pt. on vert. int. bk. wls.
			Int. per. 40,000 - 8/0,222 1,760 38,240 m				1.4.1 Ddt. 220 mm Thk. bk. wl. 2,100 + 0,075 =2,175 m ✓
			1.2.2 C.m. bagging to vert. ext. bk. wls. ✓				1.4.2 Ddt. Ext. c.m. bagging a.b & Ddt. Int. c.m. bagging a.b.
	39,12 2,70	✓ 105,62			40,00 2,70		
	40,00 2,70				38,24 2,70		
					1,50 2,18	✓ 3,27	
					1,50 2,18		
			(1)				(2)

2.2

SUPER STRUCTURE

Masonry

Brickwork

M²

220 mm Thk. bk. wl. in pls. Bks. in 1:3 c.m. mix.

105,62	1	3,27	2
- 3,27			
102,35			

102 M²

2.3

	SUPER STRUCTURE Masonry Brickwork				
1.	220 mm Thick brick wall in plaster bricks in 1:3 cement mortar mix.	M²	102		
	Carried to summary			R	

Working up marks allocation

<u>Squaring</u>		
Check side casts. (ticks)	0,5	
Check dimensioning. (ticks)	0,5	
Square dimensions.	0,5	(2,5)
Check squaring answers. (ticks)	0,5	
Transfers to abstract.	0,5	
<u>Abstracting</u>		
Section of work.	0,5	
Trades.	0,5	
Units.	0,5	(3,5)
Page referencing.	0,5	
Use of columns.	0,5	
Reducing.	0,5	
Transfers to bill.	0,5	
<u>Billing</u>		
Section of work.	0,5	
Bill no.	0,5	
Trade.	0,5	
Item no.	0,5	
Descriptions. (No abbreviations)	0,5	
Units.	0,5	(4)
Quantities.	0,5	
Summary	0,5	

(10)

TOTAL SECTION A: [40]

Copyright reserved

SECTION B

QUESTION 3

Door - Dr.
- Pt.
- Dr. lck.

Frame - Fr.
- Pt.

Adjustments

Deducts - Wl.
- pls.
- Pt.

Additions - S.b
-Scd.

(10 × 1) **[10]**

QUESTION 4

4.1
- To reduce time and labour to prepare tender documents.
- To avoid excessive writing.
- To shorten lengthy words. (3)

4.2
4.2.1 Excavation
4.2.2 Surface bed
4.2.3 Barge board
4.2.4 Extra over brickwork
4.2.5 Cement mortar
4.2.6 Paint
4.2.6 Wall plate

(7 × 1) (7)
[10]

QUESTION 5

5.1
- Check waste calculations.
- Check side casts.
- Check dimensioning.
- Multiply sequences.
- Check answers.
- Check final answers. (Any 5 × 1) (5)

5.2
- Transfer items.
- Insert section of work.
- Insert correct units of measurement.
- Insert page referencing.
- Transfer quantities.
- Do casting up.
- Reduce quantities. (Any 5 × 1) (5)

[10]

QUESTION 6

6.1 6.1.1 Pre-contract duties are duties performed before the contract period commences.

6.1.2 Post-contract duties are performed during the contract period. (2 × 2) (4)

6.2
- Prepares cost estimates and budgets.
- Prepares tender documents.
- Writes specifications.
- Calls for tenders.
- Advise on construction designs. (Any 3 × 1) (3)

6.3
- Check priced bills of quantities.
- Value construction work in progress.
- Prepares draft interim valuations.
- Prepares draft final accounts.
- Price costing of variation orders.
- Re-measure provisional quantities. (Any 3 × 1) (3)


[10]

QUESTION 7

7.1 False
7.2 True
7.3 True
7.4 True
7.5 True
7.6 True
7.7 False
7.8 True
7.9 True
7.10 True

(10 × 1) **[10]**

QUESTION 8

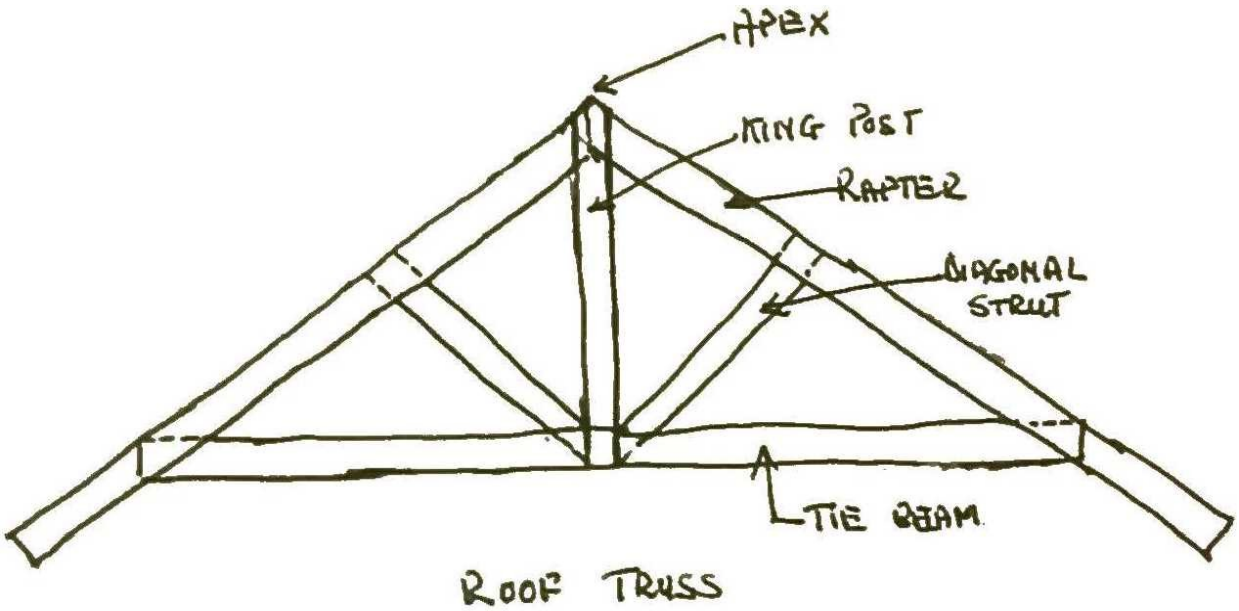

Correctness (5)
Labels (5)
[10]

TOTAL SECTION B: 60
GRAND TOTAL: 100