higher education & training

Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA

MARKING GUIDELINE

NATIONAL CERTIFICATE

BUILDING ADMINISTRATION N4

1 APRIL 2019

This marking guideline consists of 6 pages.

Copyright reserved

QUESTION 1

1.1 Pedestal drill/hand drill
1.2 Extraction units
1.3 Bench grinder
1.4 Sander (belt sander)
1.5 Mortices
1.6 Spindle moulder
1.7 Circular saws
1.8 Morticer
1.9 Planer
1.10 Cross-cut saw

(10 x 1) **[10]**

QUESTION 2

2.1 Contractor
2.2 General foreman
2.3 Artisans
2.4 Buyer
2.5 Personnel department
2.6 Costing clerk
2.7 Estimator
2.8 Valuation
2.9 Building surveyor
2.10 Quantity surveyor

(10 × 1) **[10]**


QUESTION 3

3.1
- Do not duplicate the public roads
- Be careful not to harm the environment unnecessarily
- Access should be from secondary roads and not from the main street
- Plan early for traffic controls
- Try to plan two gates, one entrance to and one exit from the site (5)

3.2
- The boundaries of the property and the neighbouring properties
- Installation regulations and the safety of the workers
- A clear view for operators operating the plant
- Shelter from the public
- Theft and vandalism
- Roadways for mobile plant (Any 5 × 1) (5)

[10]

QUESTION 4

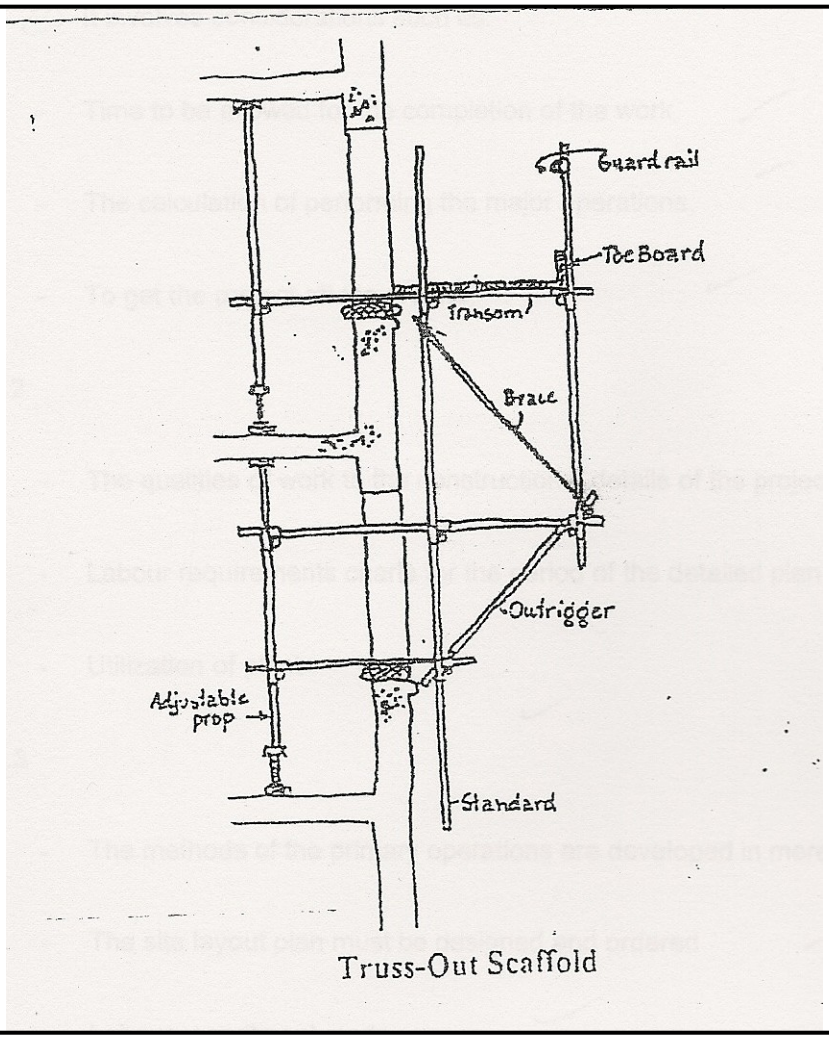

Truss-Out Scaffold

[12]

QUESTION 5

5.1 Description of the goods ordered, date of delivery, method of transport, off-loading and handling

5.2 To check goods against ordering documents, and to make both driver and receiver sign

5.3 To inform the buying department of goods needed from the suppliers

5.4 As a proof of payment which must be compared with the invoice to avoid double payment

5.5 Request for payment, and to show rates and total prices clearly

(5 × 2) **[10]**

QUESTION 6

6.1 The sequence of action steps arranged in the priority necessary to accomplish an objective (2)

6.2
- It is reasonably easy to check progress visually
- No money is wasted
- Accidents are avoided
- The authorities are satisfied
- Quarrels and disputes with the employer are prevented
- Good quality of work can be delivered
- Employees enjoy their work and can earn good wages
- Costly holds-ups are avoided (9 x 1) (9)

6.3
- To deal with problems arising from both contractors' and sub-contractors' work
- To ensure that the contractor time is not exceed
- To give instructions to the workers through their respective foremen
- To work in conjunction with the clerk of works
- To set out the building and provide levels
- To receive instructions from the architect
- To advise head office of any labour requirements (Any 6 × 1) (6)

6.4 Tender envelop (1)
[18]

QUESTION 7

7.1

A&B CONSTRUCTION LTD

176 Block Road
2094 DOORNFONTEIN
Tel. (011) 407 7071
Fax (011) 407 7072

ORDER

No. 957

PURCHASE CODE
/ /

By accepting this Order you agree to the terms and conditions printed on the back

Date:

Please carry out the supply in accordance with your quotation numbered ..... and dated ..... as follows:

ALL INVOICES statements, and correspondence relating to our Head Office QUOTING THE ABOVE NUMBER AND DATE.

PRICES

Deliver to:

Commence .....
Complete .....
See conditions overleaf

For and on behalf of
A&B CONSTRUCTION LTD

Director

(6)

7.2

INTERNAL REQUISITION

To .....

From ..... Contract No.


Date ..... No. 314

Please supply or order for the above Site the following which are required by .....(enter date)

Quantity	Enter full description of materials

(6)
[12]

QUESTION 8

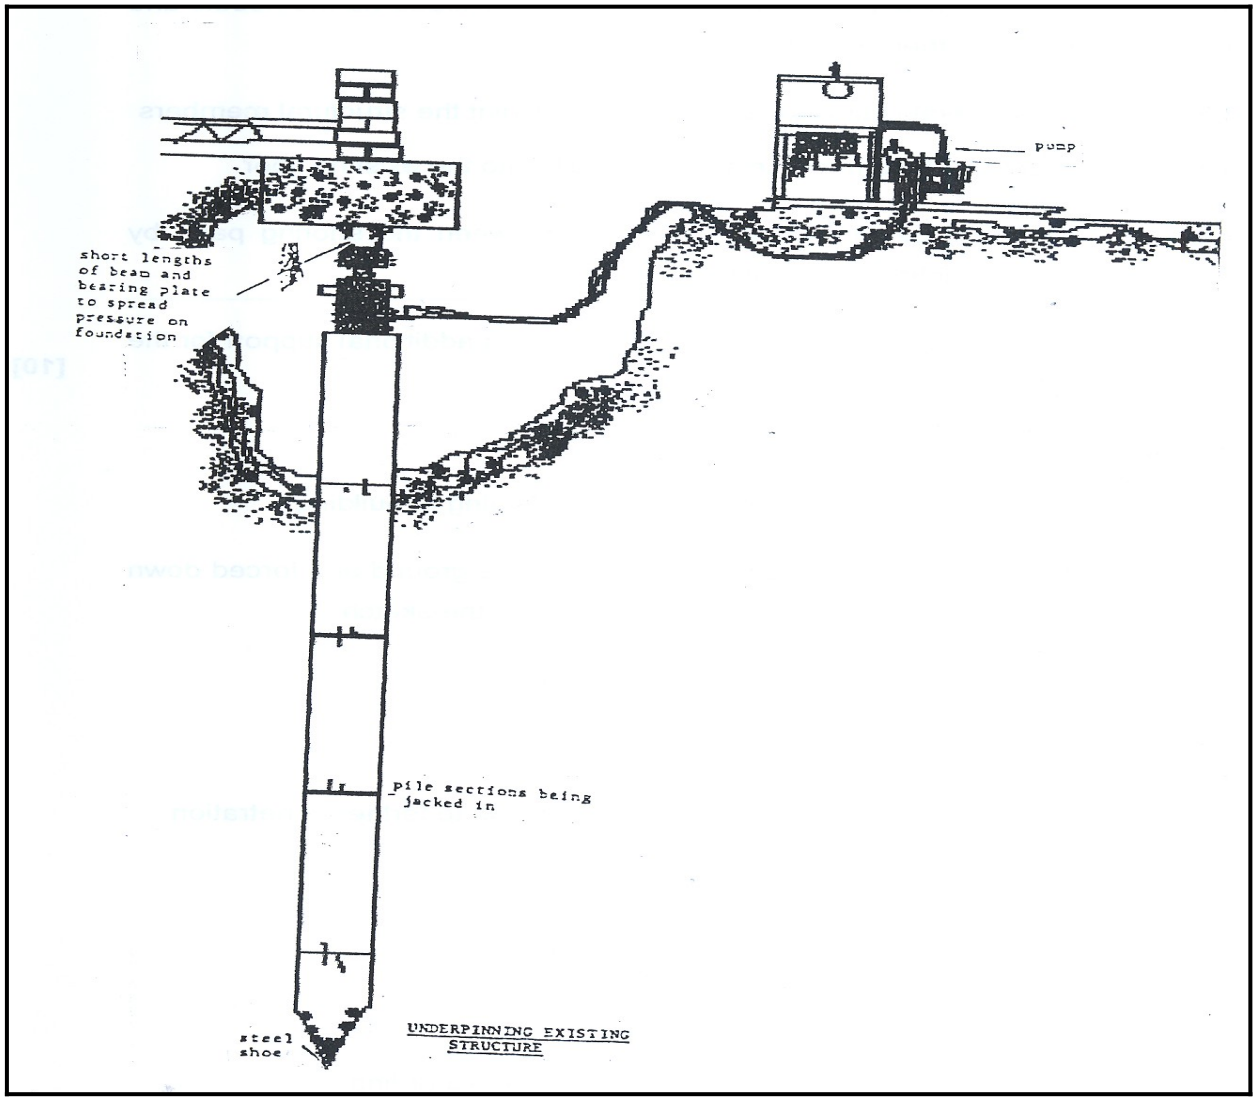

[10]

QUESTION 9

9.1 Prepares unit rates for the pricing of tenders and carries out pre-tender investigation into the cost aspect of the proposed contract

9.2 Responsible for safety of the structure, draws specialist drawings, supervise his part on site

9.3 Represents the contractor on site, responsible for the day-to-day running of the site

9.4 Prepares and submits accounts to clients and make payments to suppliers and sub-contractors

(4 × 2) **[8]**

TOTAL: 100

Copyright reserved