higher education & training

Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA

NATIONAL CERTIFICATE

BUILDING ADMINISTRATION N5

(4090045)

3 December 2019 (X-Paper)
09:00–12:00

This question paper consists of 7 pages.

Copyright reserved

DEPARTMENT OF HIGHER EDUCATION AND TRAINING
REPUBLIC OF SOUTH AFRICA

NATIONAL CERTIFICATE
BUILDING ADMINISTRATION N5
TIME: 3 HOURS
MARKS: 100

INSTRUCTIONS AND INFORMATION

1. Answer ALL the questions.
2. Read ALL the questions carefully.
3. Number the answers according to the numbering system used in this question paper.
4. Write neatly and legibly.

Copyright reserved

QUESTION 1

Complete the following sentences by filling in the missing word or words. Write only the answer next to the question number (1.1–1.10) in the ANSWER BOOK.

Whenever materials are needed on site, the general foreman contacts the (1.1) … department at the head office to order the materials from the suppliers. As soon as the materials arrive on site the foreman will check its quality and quantity and will sign the (1.2) … At the storing areas and sheds the (1.3) … has to keep record of all materials received or dispensed.

At the present time in South Africa a number of security measures must be in place as (1.4) … has become a real problem. Another big problem is the (1.5) … of materials, because it is not always handled properly and off-cuts and leftovers are left lying around, getting damaged or thrown away.

Bulk material such as sand, crushed stone and bricks should be offloaded and stored as near as possible to the (1.6) … Timber, cement and other materials that are easily damaged by (1.7) … must be kept under shelter. Chemicals such as paint and acid which are (1.8) … must be securely locked away. Sanitary fittings and glass panes should be stored on racks with enough space in between because they are (1.9) … Ironmongery, taps and other small items have to arrive as late as possible on site and are only fixed at the latest stage possible, because they can be (1.10) …

(10 × 1) **[10]**

QUESTION 2

Choose the correct personnel member to be found on a construction site from the following list for each definition below by writing only the answer next to the question number (2.1–2.10) in the ANSWER BOOK.

nominated subcontractor; consultant; unskilled labourer; building control officer; general foreman; apprentice; trades foreman; operator; town planner; selected subcontractor; clerk of works; resident engineer; storekeeper; surveyor; artisan; building surveyor

2.1 Head of each of the various working groups who delegates work to the artisans, apprentice and labourers

2.2 Checks the material when it arrives on site, signs the delivery note and record the goods

2.3 A tradesman

2.4 Ensures that the building is on the right spot, is plumb and that the floor levels are at the designed height

2.5 A secondary contractor, but concludes a contract with the main contractor

2.6 Organises all activities and ensures the smooth running of the construction

2.7 The official of the local authority who makes sure that building regulations are adhered to

2.8 Claims and settles interim payments and the final account with the quantity surveyor

2.9 Represents the architect on site and monitors and certifies the work and material to his/her satisfaction

2.10 Represent the engineer on site and monitors and certifies work and material to his/her satisfaction

(10 × 1) **[10]**

QUESTION 3

Indicate whether the following statements are TRUE or FALSE. Choose the answer and write only 'True' or 'False' next to the question number (3.1–3.10) in the ANSWER BOOK.

3.1 Variation orders could be savings or extras.

3.2 Variation orders are site instructions.

3.3 Additions are variation orders.

3.4 Extension of time is calculated by day works.

3.5 Day works are day-to-day happenings on site.

3.6 Day works are all the works above the natural ground level.

3.7 The contingency sum provides money for extras.

3.8 Day work is the measured labour and material per day.

3.9 Variation orders are issued by the clerk of works.

3.10 Omissions are savings.

(10 × 1) **[10]**

Copyright reserved

QUESTION 4

Briefly describe the operational uses for the following mechanical plants:

4.1 Conveyor belt

4.2 Dragline

4.3 Grader

4.4 Backacter

4.5 Tractor shovel

4.6 Trencher

4.7 Bulldozer

4.8 Tipping lorry

4.9 Scraper

4.10 Face shovel

(10 × 1) **[10]**

QUESTION 5

5.1 Write the following acronyms and abbreviations in full. They are used in a project schedule:

5.1.1 PERT

5.1.2 GERT


5.1.3 PDM

5.1.4 ADM

5.1.5 WBS

(5 × 1) (5)

5.2 Name the style for the activity shown in the diagram below by writing only the answer next to the letter (a–f) in the ANSWER BOOK.

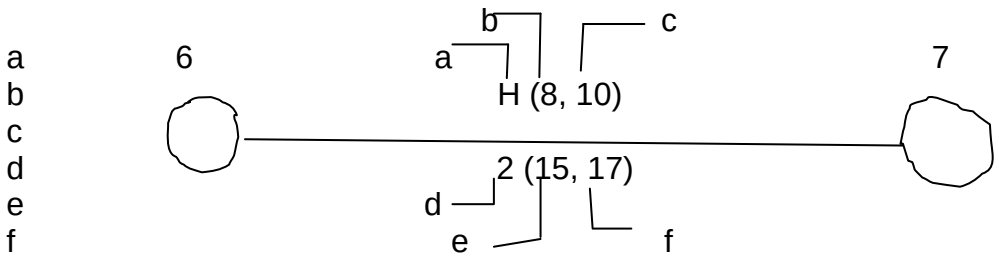

(5)
[10]

QUESTION 6

Fully explain the meaning of the following in a building contract:

6.1 Nominated subcontractors

6.2 Selected subcontractors

(2 × 5) **[10]**

QUESTION 7

State FIVE advantages of a critical path method over a bar chart. **[10]**

QUESTION 8

Define the following terms as used in management:

8.1 Forecast

8.2 Planning

8.3 Organising

8.4 Coordinating

8.5 Controlling

(5 × 2) **[10]**

QUESTION 9

Prepare a complete agenda for the contractors' site meeting where you will be the chairperson. **[10]**

Copyright reserved

QUESTION 10

Define the following terms used in project scheduling:

10.1 Mandatory dependencies

10.2 Discretionary dependencies

10.3 Slack time

10.4 Lag

10.5 Resource levelling

(5 × 2) **[10]**

TOTAL: 100

Copyright reserved